


Universal Flachheizkörper Typ 22

Höhe mm	300		400		500		600		900	
Exponent n	1,3156		1,3239		1,3323		1,3406		1,3460	
75/65/20°C/m	1003		1274		1524		1754		2343	
Breite mm	55/45 °C		55/45 °C		55/45 °C		55/45 °C		55/45 °C	
	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C
400	205		259		309		354		471	
	00322304	324	00322404	411	00322504	491	00322604	564	00322904	753
500	256		324		386		442		589	
	00322305	405	00322405	514	00322505	614	00322605	705	00322905	941
600	307		389		463		531		707	
	00322306	486	00322406	616	00322506	736	00322606	846	00322906	1.130
700	359		453		540		619		825	
	00322307	567	00322407	719	00322507	859	00322607	987	00322907	1.318
800	410		518		617		707		942	
	00322308	648	00322408	822	00322508	982	00322608	1.128	00322908	1.506
900	461		583		694		796		1.060	
	00322309	729	00322409	925	00322509	1.105	00322609	1.270	00322909	1.694
1000	512		648		772		884		1.178	
	00322310	810	00322410	1.027	00322510	1.227	00322610	1.411	00322910	1.883
1100	563		713		849		973		1.296	
	00322311	891	00322411	1.130	00322511	1.350	00322611	1.552	00322911	2.071
1200	615		777		926		1.061		1.414	
	00322312	972	00322412	1.233	00322512	1.473	00322612	1.693	00322912	2.259
1400	717		907		1.080		1.238		1.649	
	00322314	1.134	00322414	1.438	00322514	1.718	00322614	1.975	00322914	2.636
1600	819		1.037		1.235		1.415		1.885	
	00322316	1.296	00322416	1.644	00322516	1.964	00322616	2.257	00322916	3.012
1800	922		1.166		1.389		1.592		2.120	
	00322318	1.458	00322418	1.849	00322518	2.209	00322618	2.539	00322918	3.389
2000	1.024		1.296		1.543		1.769		2.356	
	00322320	1.620	00322420	2.055	00322520	2.455	00322620	2.821	00322920	3.765
2200	1.127		1.425		1.698		1.945		2.592	
	00322322	1.782	00322422	2.260	00322522	2.700	00322622	3.103	00322922	4.142
2600	1.332		1.684		2.006		2.299		3.063	
	00322326	2.106	00322426	2.671	00322526	3.191	00322626	3.667	00322926	4.895
3000	1.537		1.943		2.315		2.653		3.534	
	00322330	2.430	00322430	3.082	00322530	3.682	00322630	4.232	00322930	5.648



Leistungen in Watt

Universal Flachheizkörper Typ 22

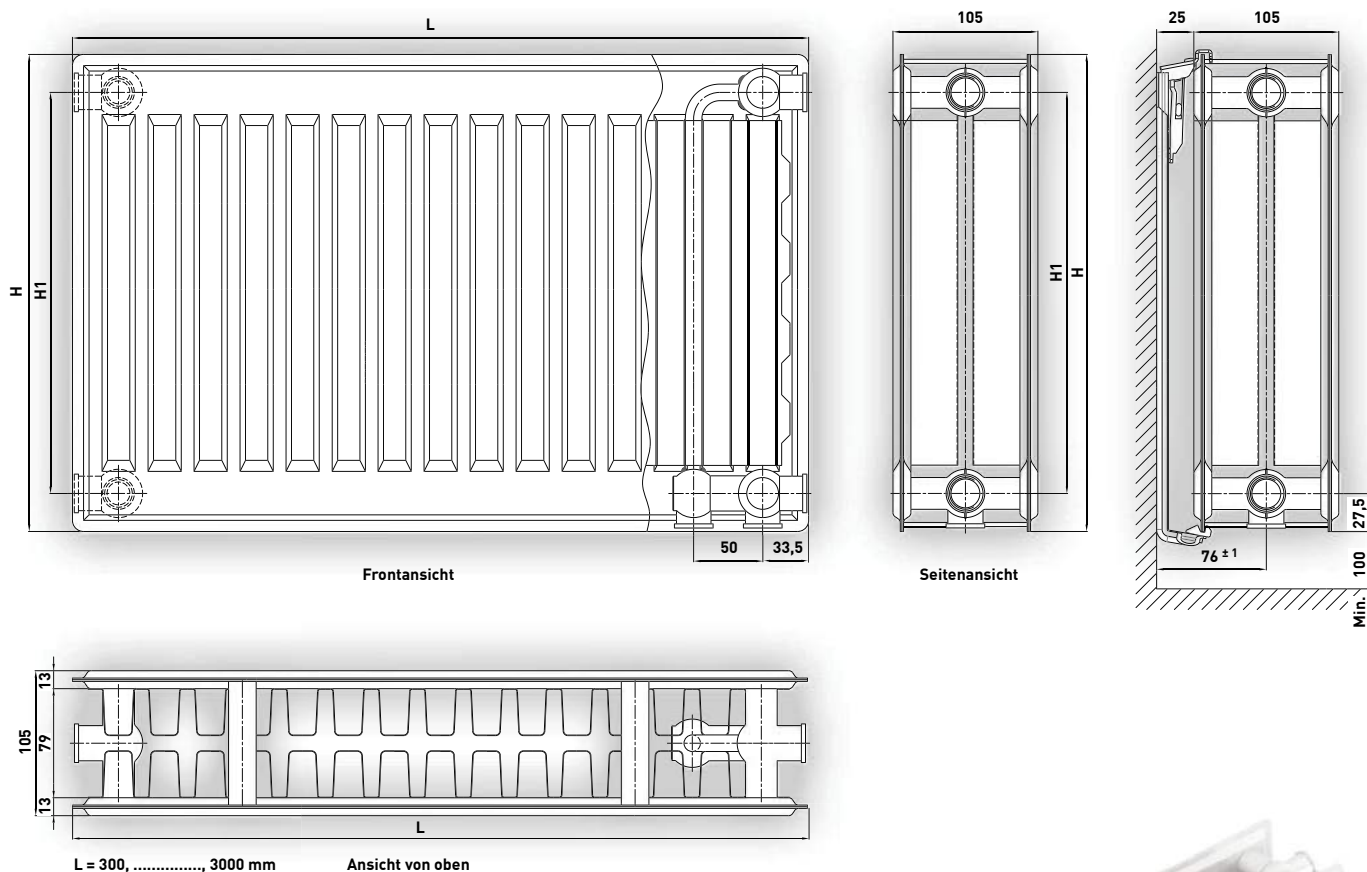

Für Heizkörper der Länge bis 1400 mm werden 2 Stk.
und ab der Länge 1500 mm werden 3 Stk. Befestigungen benötigt.

H	H1	Inhalt	Gewicht/m
300	245	3,2	16,21
400	345	3,9	21,36
500	445	4,9	26,63
600	545	5,9	31,92
900	845	8,1	47,79

