

Vertikal Planheizkörper Typ 10 + 20

Typ 10 – Ausführung Standard						
Höhe mm Exponent n	1600 1,289	1800 1,28	2000 1,27			
Breite mm	55/45 °C		55/45 °C		55/45 °C	
	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C	Art. Nr.	70/55 °C
	Gewicht	75/65 °C	Gewicht	75/65 °C	Gewicht	75/65 °C
500	369	415	461			
	00411165	561	00411185	631	00411205	701
	26,3 kg	717	29,2 kg	806	32,1 kg	896
600	431	485	539			
	00411166	656	00411186	738	00411206	820
	30,7 kg	838	34,2 kg	943	37,8 kg	1.048

Typ 20 – Ausführung Standard						
Exponent n	1,33	1,316	1,29			
500	442	497	552			
	00412165	701	00412185	787	00412205	874
	42,6 kg	914	47,5 kg	1.027	52,5 kg	1.140
600	519	583	647			
	00412166	860	00412186	966	00412206	1.073
	50,2 kg	1.091	56,1 kg	1.226	62,0 kg	1.361

Typ 10 – Ausführung Premium						
Exponent n	1,289	1,28	1,27			
500	369	415	461			
	00421165	561	00421185	631	00421205	701
	26,3 kg	717	29,2 kg	806	32,1 kg	896
600	431	485	539			
	00421166	656	00421186	738	00421206	820
	30,7 kg	838	34,2 kg	943	37,8 kg	1.048

Typ 20 – Ausführung Premium						
Exponent n	1,33	1,316	1,29			
500	442	497	552			
	00422165	701	00422185	787	00422205	874
	42,6 kg	914	47,5 kg	1.027	52,5 kg	1.140
600	519	583	647			
	00422166	860	00422186	966	00422206	1.073
	50,2 kg	1.091	56,1 kg	1.226	62,0 kg	1.361




Leistungen in Watt




Vertikal Planheizkörper Typ 10 + 20

Typ 10

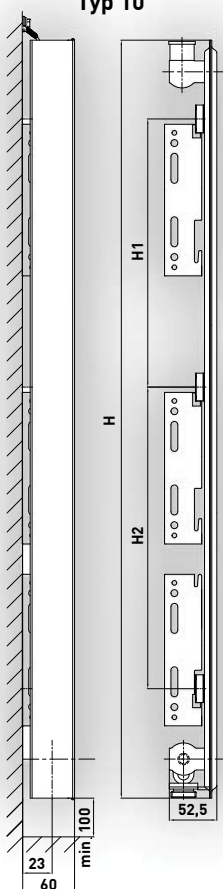


Typ 20

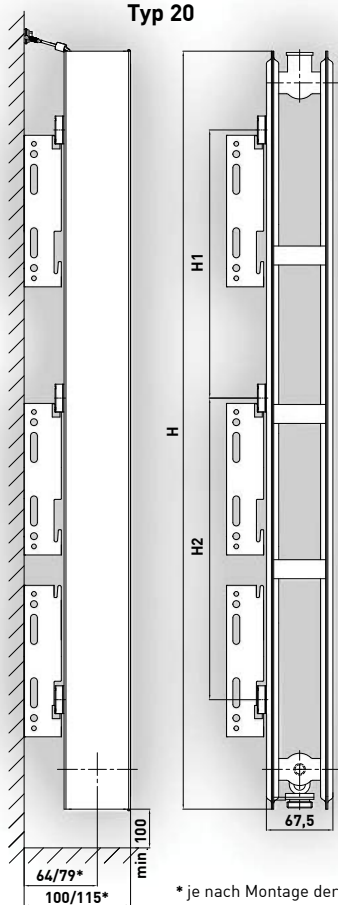


* je nach Montage der L-Konsole

L-Konsole

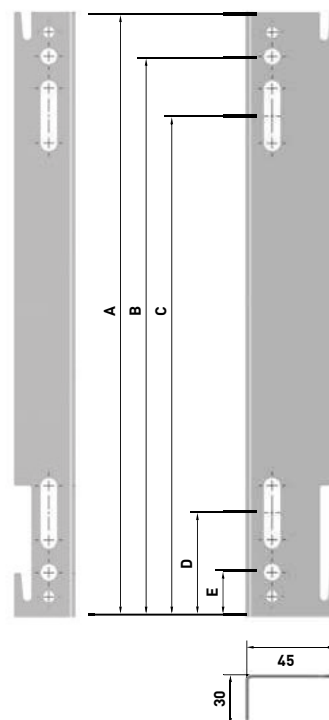

A mm	277
B mm	255
C mm	225,5
D mm	51,5
E mm	22

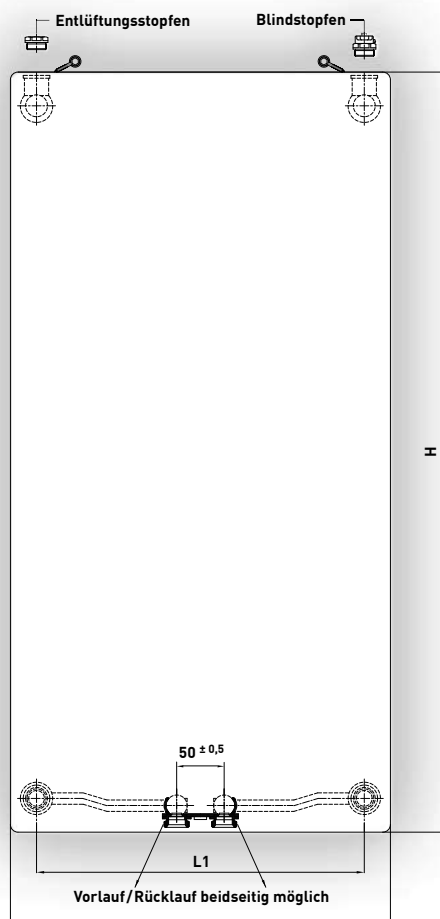

H	1600	1800	2000
H1	666,5	766,5	866,5
H2			
L	500	600	
L1	445	545	